

NovoTouch



SPECIFICATIONS	65"	75"	86"	98"
Model Name	NovoTouch LK6530i	NovoTouch LK7530i	NovoTouch LK8630i	NovoTouch LK9810i
Display Technology	Backlit LED (IPS Panel)	Backlit LED (IPS Panel)	Backlit LED (IPS Panel)	Backlit LED (IPS Panel)
Panel Size; Aspect Ratio	65", 16:9	75", 16:9	86", 16:9	98", 16:9
Brightness	350cd/m ²	330cd/m ²	330cd/m ²	440cd/m ²
Contrast Ratio (Typical)	1,200:1	1,200:1	1,200:1	1,300:1
Native Resolution	4K Ultra-HD (3840 x 2160)			
Viewing Angle (Horiz/Vert)	178°/178°			
Refresh Rate (Hz)	60Hz	60Hz	60Hz	120Hz
Display Color (Bit)	1.06 billion (10-bit)			
Orientation	Landscape			
Touch Technology	Infrared Touch			
Touch Points	10 Writing, 20 Touch	10 Writing, 20 Touch	10 Writing, 20 Touch	5 Writing, 10 Touch
Surface Protection	4mm Thick Toughened Glass (Level 7H on Mohs Scale of Mineral Hardness)			
Minimum Touch Object	Single-Touch ≥Φ6mm and Multi-Touch ≥Φ8mm			
Touch Tools	Finger, Stylus, Glove, Opaque Objects			
Gestures Supported	Yes			
System Version	Android™ v6.0	Android™ v6.0	Android™ v6.0	Android™ v4.2.1
CPU	RK3399, Dual-Core ARM® Cortex® A72 and Quad Core ARM® Cortex® A53			ARM® Cortex® A9 Dual Core CPU
GPU	Mali™ T860	Mali™ T860	Mali™ T860	Quad Core GPU
RAM	4GB DDR3	4GB DDR3	4GB DDR3	1.5G RAM
Internal Storage	16GB	16GB	16GB	8GB
OS Compatibility	Windows® (Windows 7 and above: Driver Free), Mac® (10.10 and above), Android™ (2.2/2.3/4.0/4.1/4.2 (Kernel v3.5 and above - Driver Free), Chrome (v39 and above), Linux (Kernel v3.5 and above)			
I/O Ports	HDMI v2 (x1), HDMI v1.4 (x2), DisplayPort (x1), VGA-In (x1), Audio-In (3.5mm) (x1), AV-In (x1), HDMI-Out (1080P) (x1), Audio-Out (3.5mm) (x1), Coaxial-Out (RCA) (x1), LAN (RJ45) (x1), RS232 (x1), USB Type A 2.0 (x4), USB Type A 3.0 (x2), USB Type B (x2)			HDMI v1.4 (x1), HDMI v1.3 (x3), AV-In (x1), VGA-In (x3), Audio-In (x3), VGA-Out (x1), Audio-Out (3.5mm) (x1), Coaxial-Out (RCA) (x1), LAN (RJ45) (x1), RS232 (x1), USB Type A 2.0 (x4), USB 3.0 (x1), USB Type B (x2)
Internal Speakers	12W (x2) (Stereo)	12W (x2) (Stereo)	12W (x2) (Stereo)	10W (x2) (Stereo)
Power Supply (Internal)	AC 100-240V, 50/60Hz			
Dimensions	1,521 x 915 x 98 mm	1,762 x 1,034 x 100 mm	1,988 x 1,178 x 99.6 mm	2,257 x 1,335 x 118 mm
Weight (Net)	46 kg	60 kg	107 kg	150 kg
Accessories (Standard)	AC Power Cord, VGA Cable, USB Cable, Audio Cable, Stylus (x3), Remote Control, Wall Mount Kit, Documentation Kit			

NovoTouch



Collaborative. Interactive. Flat Panel.

Tel: +31 20-8003960, Web: www.vivitek.eu, Address: Zandsteen 15, 2132 MZ Hoofddorp, The Netherlands

© Copyright 2017 Vivitek. Vivitek is a registered trademark of Delta Electronics, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments. All specifications are subject to change at any time.

www.vivitek.eu


A brand of DELTA

NovoTouch

NovoTouch is a powerful team collaboration solution that's ideal for conference rooms, meeting areas and corporate lobbies. Equipped with Vivitek's **NovoConnect Solution**, a BYOD collaboration system, **NovoTouch** offers an advanced

approach to group work in an all-in-one display. Featuring digital annotation and wireless capabilities, **NovoTouch** seamlessly connects users to one display, using technology that allows ideas to flow naturally.

- ✓ Ultra HD 4K (3,840 x 2,160) resolution for outstanding details and stunning visuals
- ✓ Complete range of display sizes including 98", 86", 75" and 65"
- ✓ LED backlit technology for brighter picture, longer life and lower energy cost
- ✓ High contrast ratio and fast response time delivering crisp, readable content
- ✓ An anti-glare surface improves the screen visibility in high ambient light environments and a 4mm thick toughened glass provides added protection against screen damage

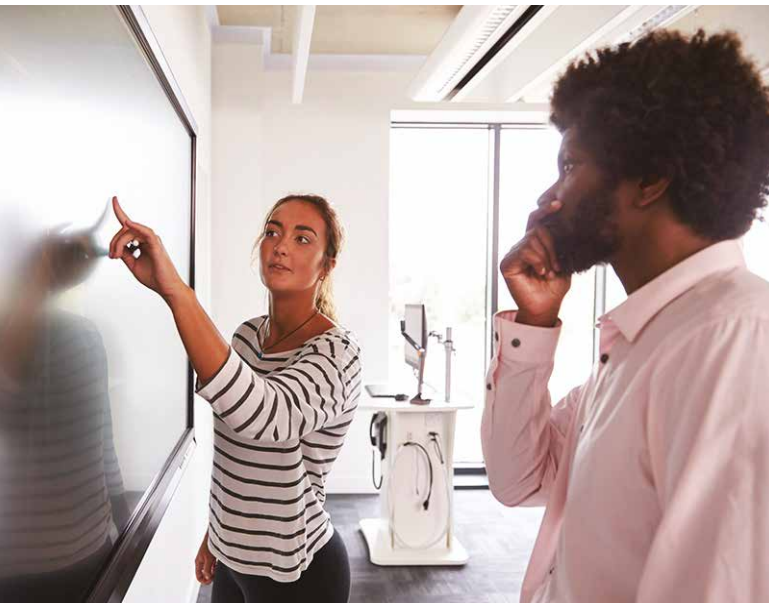

Touch + Pro

A new way to engage and interact with big data visualization

- ✓ Connect up to 64 users and display up to four screens, simultaneously, on a large format display
- ✓ Built-in whiteboard and touch panel capabilities
- ✓ On-screen annotation, mark-up and wireless distribution
- ✓ Native screen mirroring via AirPlay and Google Cast

- ✓ Dual network support for separate or parallel wired and wireless connections for ultra secure networks
- ✓ Optional Accessory: **LauncherPlus**, a USB device that provides tactile operation without installing the software
- ✓ Reduces clutter and promotes a cable-free workplace with Wi-Fi connection and wireless file sharing

LauncherPlus



Transform your conference room into a true collaborative space

The easy and affordable collaboration solution, NovoTouch creates an interactive environment for a fluid exchange of ideas.

Features include:



ENGAGE

Users can manipulate content with up to 20-points of touch, common gesture interactivity and on-screen annotation



INSPIRE

Think differently during group work with side-by-side collaboration on one large display



TEAMWORK

Up to 64 devices can connect, and four members can share content on the display, for a fluid exchange of ideas



CREATE

Interact with content directly on the display to take notes or emphasize things in real time



COLLABORATE

Effortlessly integrate content into discussions to share ideas, increase productivity and drive innovation